

## B35 EB BLUELIFT

### The BLUELIFT Series

The new 100% electric Bluelift B35 EB is the smallest model in our fleet, providing emission, odor, and noise free operation at indoor facilities. At a mere 10 feet in length and less than 3440 pounds, the B35 EB fits into a standard shopping mall or office building elevator. When necessary, the jib can be removed to reduce length and weight even further. Its new revolutionary basket elevation system allows it to work below the floor level, providing a completely new and safer way to maintain handrail walls and surfaces.


Powered by lithium batteries, the B35 EB can travel inside multi-level buildings and maintain areas up to 35 feet high.

Features of the Bluelift series lifts:


- Available in 7 models from 35ft - 101ft
- Lithium battery and combustion engine - check model availability
- Pass through a single or double door opening
- Set up on uneven surfaces
- Detachable basket

We reserve the right to alterations

Model	B35 EB
Working height	34'- 8"
Max Outreach, 264 lbs	20'- 4"
Outreach 440 lbs	17'- 4"
Basket capacity	440 lbs
Basket dimensions	4'- 3" x 2'- 3"
Basket rotation	+/-90°
Turret rotation	340°
Height	6'- 5"
Length (w/ basket)	12'- 5"
Length (w/o basket)	10'- 2"
Length (w/o basket or jib)	7'- 8"
Width (w/o basket)	2'- 10"
Footprint	8'- 11" x 7'- 10"
Weight (approx)	3,384 lbs
Weight (w/ basket or jib)	2,854 lbs
Max pressure, tracks	5.52 psi
Track size (per track)	44" x 6.5"
Max pressure food pad	11.1 psi
Foot pad size	15-3/4" x 15-3/4"
Lithium Battery	Standard
Hetronic Remote	Standard

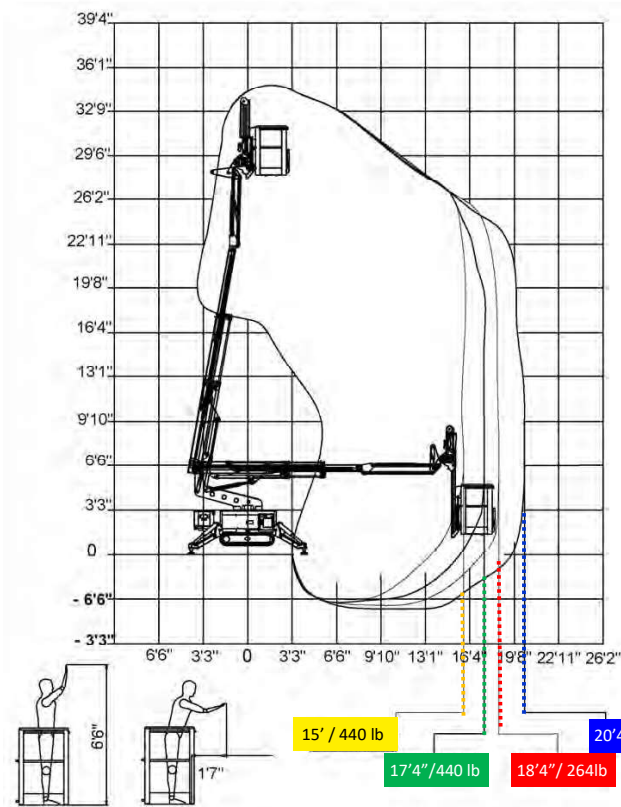

WORKING PARAMETERS

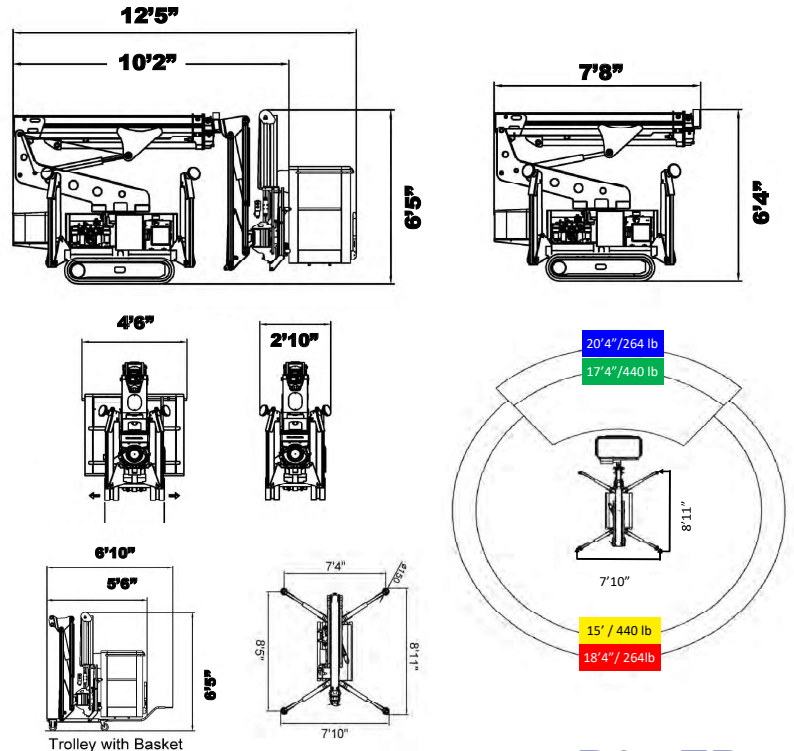

**B35 EB  
BLUELIFT**

**Standard Equipment**

- Lithium batteries
- Basket elevation system
- Hetronic remote
- Adjusting tracks
- Non marking tracks
- Trolley for jib
- Quick detach basket
- Hydraulic leveling platform
- 3 section telescopic boom with  $-17^{\circ}/+80^{\circ}$  working angle
- Removable jib with  $110^{\circ}$  working angle

**Optional Equipment**

- Anti-entrapment system
- GO home function

